

The H2W Servo-driven Press: Designed for Superior Flexibility and Accuracy.

- Ideal for progressive, transfer or manual die operations
- Incorporates modern, state of the art A.C. servo technology into mechanical stamping press designs
- Ability to control slide velocity throughout the stamping work being done—optimal slide motion can be set for any application
- Maintains constant working energy throughout stroke regardless of slide velocity
- Provides ability to dwell at position to allow timing of secondary work within the press cycle time
- Improved part quality
- Increased die life
- Ability to program multiple motion paths before returning to top dead center
- Automatically maintain and adjust slide position to assure consistent die height
- Elimination of high maintenance mechanical components like the clutch-brake unit
- Controlled slide velocity can reduce the importance of die or part lubrication
- Reduces die tryout time and expense
- Saves energy cost by reducing electricity consumption

A Higher Level of Standard Equipment for Increased Performance

- Heavy plate, rigid frame construction
- Bolster thickness exceeds JIC standards
- Wide windows for transfer and progressive applications
- Single-piece, heavy duty true box-type slide, prepared for knockouts
- Precision plunger guide design
- Push-button controlled, motorized slide adjustment
- Mechanical slide lock mechanism
- Multiple gear reduction for greater torque capacity
- Precision oil-lubricated long 6-point gibs
- Hardened and ground helical gears
- Pneumatic counter balance
- 2 variable speed main servo motors
- Quick-responding, dependable hydraulic overload protector
- Shock resistant, pendant-mounted control
- T-stand for easy set-up and operation
- 100 job memory
- Safety block with interlock

The Komatsu Warranty


When a press is designed as a system, it should be expected to perform as a system without routine tear downs for wear items (the conventional “weak link” in our competitors’ presses). That’s why every Komatsu H2W press comes with a One Year Unconditional Warranty on anything that rolls, slides or moves—parts and labor. Unlike other manufacturers, there is no hourly limit—your press is guaranteed to perform 3 shifts a day, 7 days a week, 365 days a year. With Komatsu systems engineering, it’s possible to extract the full potential from your press, and the full revenue potential from every job.



KOMATSU
HIGH PERFORMANCE SHOULD NOT BE OPTIONAL[®]

H2W

Komatsu H2W Series Hybrid A.C. Servo Straight Side Power Presses

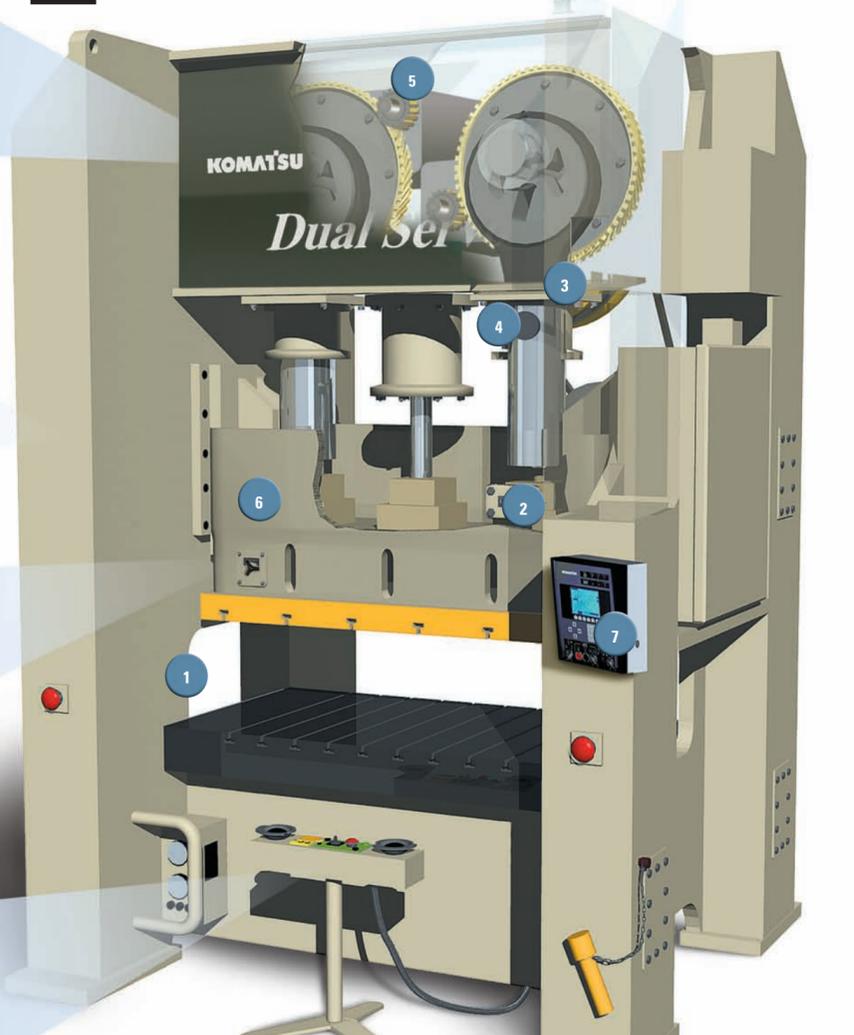

Two Independent Servo Drives

True Symmetrical Unitized Straight Side Frame





Cross-sectional area of sideframes exceeds many tie-rod designs

Bolster and Slide Machining

JIC Standard “T” Slots
JIC Standard pin holes in bolster
Prepared for Mechanical Knockouts - JIC knockout pattern

T-Stand

All switches and push-buttons necessary for ordinary press operation, including motorized slide adjustment



Standard Features

1 Symmetrical Unitized Frame

Engineered quality. The H2W employs an extremely rigid balanced symmetrical design. Komatsu utilizes its welding and frame design technologies to engineer the one-piece welded frame, providing the rigidity of the larger tonnage straight sides at an affordable cost. H2W also offers a wide window for transfer and progressive applications. With all this, you get the Komatsu standard of uncompromising accuracy and high part consistency stroke after stroke.




2 Accuracy within microns

A Linear Glass Scale is mounted to each side of the frame of the press to monitor slide position, assuring repeatable die height consistency at the bottom of the stroke where the work is being done. The linear scales are mounted to a sub-frame, fixed at the bottom to assure slide position accuracy and allowed to “float” at the top while the press frame is under load.




3 Independent Servo Drive System...

...with auto die height adjustment. The H2W series incorporates a dual servo drive system with independent control and monitoring of each connection point’s (right/left) actual position. The press control monitors the slide position from both sides to assure consistent part quality. The independent right/left controls allow for slide tilt correction felt during eccentric loads. The H2W keeps slide tilt at a minimum during eccentric load conditions. height adjustments are automatically made during ordinary operation of the press. Position monitoring of main shaft angle detector, motor encoder and actual slide position by the linear scale.




4 Plunger Guide System

Designed for high precision and less die wear. Thrust load from eccentric motion is absorbed by the plunger guide system. The plunger guide is the primary guiding force, preventing side load on the gibs. A size-specific plunger guide is engineered for each different press model, providing maximum performance for each unit. Komatsu also employs full-length gibs that capture the entire length of the slide guide. Gib tolerances are set to Komatsu’s tolerances of 0.0015” nom. per gib with oil (not grease) lubrication, allowing them to last up to 200 times longer than conventional gibs. Together, the plunger guide and gib surface area of the Komatsu H2W add up to 4 – 5 times the guiding surface area of our nearest competitors. Less routine gib maintenance, less die wear and higher part accuracy are the positive end result, which can translate into improved profits for you.




5 Drive system and control

Komatsu’s unique combination of a high-torque gear box with a standard, high-efficiency AC servo motor allows for a compact and efficient drive system. The resulting symmetrical motion curve of the drive allows for increased productivity through the incorporation of a pendulum mode of operation. Dies requiring shorter stroke for operation can achieve increased productivity while maintaining the full benefits of the servo drive system..

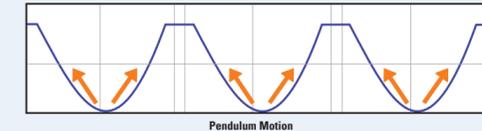

6 Hydraulic Overload Protector

Helps prevent damage to the press and dies. All Komatsu presses are equipped with a hydraulic overload protector, a standard feature that has been standard for decades, helping to protect against damage to the press or die sets. If the rated load is exceeded, the press stops automatically. Since the hydraulic pressure can be released easily, operations can be resumed smoothly even if jamming occurs.



7 SIT IV® - System Integrated Terminal

Advanced electronics technology provides user-friendly operation and outstanding reliability. The SIT IV electronic press control unit is designed to provide the fastest, easiest, and most reliable control available for all press functions. Included as standard equipment on the Komatsu H2W press, SIT IV incorporates all the latest thinking in press control unit design.

- All information necessary for press set-up, start-up, operation and diagnostics is available in one display, at the touch of a button.
- Language terminology and graphics are user-friendly, easily understood by the press operator in plain view in one central location on the digital display. Display also includes plain language description of fault messages.
- SIT IV has the ability to integrate with current press room equipment, such as electronic coil feeds.
- Operator “T-stand” control interface houses all switches and push-buttons required for ordinary press set-up and operation, including Push Buttons for slide adjustment.
- Die Data Recording function can store and retrieve data, including cam and fault detection angle as well as production performance. Also includes digital display of “stored” press speed and actual press speed, plus crank angle.
- Alpha-numeric entry of die name and memo data for easy cataloging and referencing.
- 8.4” Color Screen
- Built in Comm. Port for optional V-I-S
- Digital Total Counters
- 1-production, re-settable
- 1-1ot (pre-set), re-settable
- 4 - Electronic rotary cams
- 1- Pneumatic air ejector with cam
- Mode Selections:
 - (1) Off, (2) Inch, (3) Single Stroke,
 - (4) Continuous
- Optional Modes:
 - (1) Automatic Single Stroke, (2) Automatic Continuous



Simple guidance. SIT IV displays operational procedure guidance for select press functions. Intuitive, user-friendly prompts guide press operators in a logical series of steps, for faster, more reliable press set up and operation. The SIT IV pendant is also used for all motion programming. Slide velocity is adjusted in percentage values. When a velocity change is desired, the exact position where this change occurs can be set by actual slide position or in degrees of operation. The slide motion can be programmed to multiple stages before a complete return to Cycle Start Position (CPS) must occur.

- Extensive use of electronics gives outstanding reliability.**
- Solid-state control
 - Integrated Circuits are used for all control circuits
 - Increased safety, longer operation life and high reliability

Digital display for improved operation performance. Digital display of the crank angle and electronic angle detectors provide increased accuracy for press operations. Automatic operation setting and die set-up functions are easier and faster for press operators, with precise, reliable settings every time. To protect the integrity of all electronic systems and provide additional safety, monitor lamps indicate defects in circuits of all electronic systems, and faults are detected instantly.

Optional Features

Electronic Load Monitor (2-channel) Load monitors are available to continuously monitor loads in all press operations, including blanking, bending, drawing, etc. The monitor also detects die overloads and underloads during operation. In addition, balanced die load is achieved by measuring the off-center-load, thus extending press and die life. (Note: required for VIS)

- Increased Job Storage Memory**
- Vibration Isolating Pad**
- Emergency Stop Receptacle**
- Pneumatic Die Cushions**
- Slide Knockout (mechanical)**
- Air Ejector with Cam**
- Adjustable Hydraulic Overload**
- Coil Line Interface**
- Photoelectric Safety Equipment**
- Quick Die Change Interface**

Additional set of 4 Electronic Rotary Cams

Graphic Load Monitor with Reverse Load


Quick Die Equipment
Hydraulic die clamps available in either lever or cylinder type. Hydraulic die lifters. Mechanical draw out rails. (note: re-machining of “T” slots may be required)

Warning - For protection of the operator, point of use guards should be used at all times. The H2W press does not include O.S.H.A. recommended point of protection guards.

Note - Immediate Stopping Performance monitor and control reliability. This control meets the current requirements of O.S.H.A. Standards Section 1910.217, ANSI B11.1, and CSA Z142.

Automation Complete turn-key Komatsu designed press systems including coil lines, die cutting and systems engineering tailored to your specific application.

V-I-S Visual Inspection System
Monitor slide motion and velocity, and make adjustments—right from your USB-equipped laptop or PC!



- Slide motion (from actual operation)
- Touch speed
- Maximum loading point
- Monitors precise touch points
- End of forming process

