



110


150

200




KOMATSU
HIGH PERFORMANCE SHOULD NOT BE OPTIONAL

General View ("C" Frame)

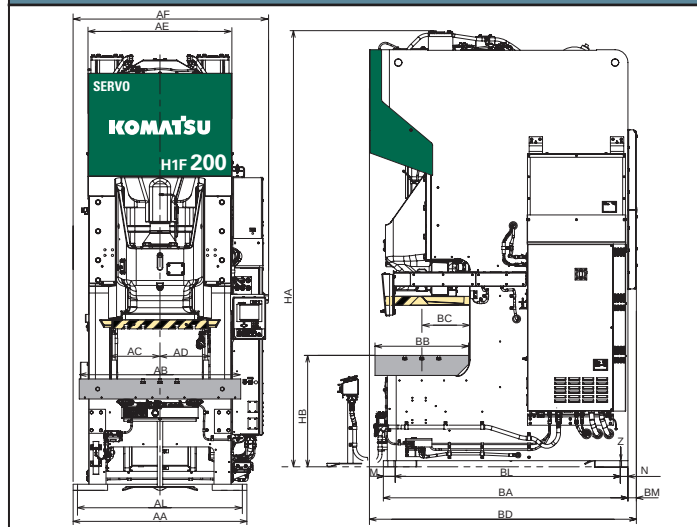

General View ("O" Frame)

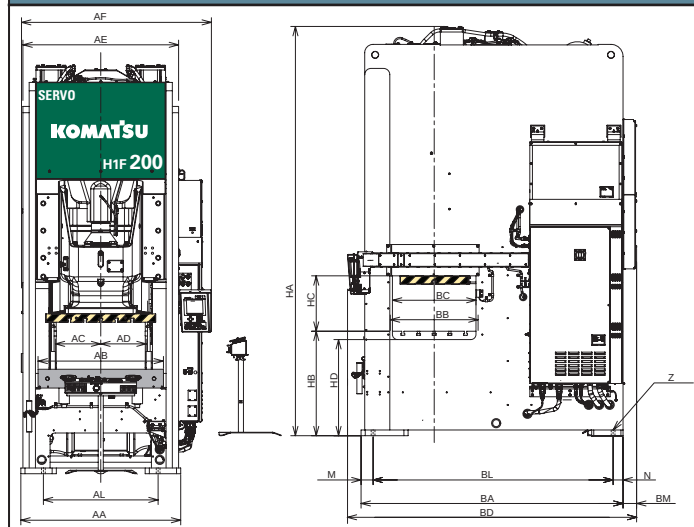

Specifications (inches)		("C" Frame)			("O" Frame)		
		H1F 110-2	H1F 150-2	H1F 200-2	H1F 110-2	H1F 150-2	H1F 200-2
AA		46.46	51.57	61.42	46.06	53.54	60.24
AB		43.31	49.21	57.09	35.43	42.13	47.24
AC		10.87	12.17	15.35	12.44	14.53	17.13
AD		10.87	12.17	15.35	12.44	14.53	17.13
AE		38.23	43.74	50.83	44.49	51.97	58.66
AF		55.43	60.75	69.09	58.11	65.31	71.54
AL		42.91	48.43	56.02	32.28	38.98	43.23
BA		67.13	75.04	86.46	78.15	88.62	98.70
BB		26.77	29.92	33.07	26.77	29.92	33.07
BC		14.17	15.35	16.93	24.80	27.17	31.50
BD		89.04	94.92	108.74	89.04	95.43	108.94
BL		57.28	63.43	77.01	68.31	77.99	90.43
BM		2.03	0.51	2.99	2.03	0.51	5.12
HA		126.58	132.99	154.17	126.58	132.95	154.21
HB		35.43 Std / 34.25 Long	35.43 Std / 34.25 Long	39.37 Std / 38.19 Long	35.43 Std / 34.25 Long	35.43 Std / 34.25 Long	39.37 Std / 38.19 Long
HC		—	—	—	16.34	19.13	20.87
HD		—	—	—	32.28	32.28	36.22
M		4.92	5.91	4.53	4.92	4.92	4.53
N		4.92	5.71	4.92	4.92	5.71	3.74
Z		1.26	1.42	1.42	1.26	1.42	1.42

Model Specifications		H1F110-2	H1F150-2	H1F200-2	H1F110-2	H1F150-2	H1F200-2
Frame Type		Gap Frame			"O" Frame		
Max. Capacity	US ton	121	165	220	121	165	220
Rating Point	in.	0.20"	0.24"	0.24"	0.20"	0.24"	0.24"
Stroke	in.	7.87"	9.84"	11.8"	7.87"	9.84"	11.8"
Speed	s.p.m.	70	60	50	70	60	50
Pendulum Stroke	in.	1.18" - 5.91"	1.18" - 7.87"	1.18" - 9.84"	1.18" - 5.91"	1.18" - 7.87"	1.18" - 9.84"
Pendulum Speed	s.p.m.	~138	~128	~124	~138	~128	~124
Die height	STD	in.	13.78"	16.54"	13.78"	16.54"	17.72"
	Long	in.	14.96"	17.72"	14.96"	17.72"	18.90"
Slide Adjustment	in.	3.94"	3.94"	4.72"	3.94"	3.94"	4.72"
Slide	Width	in.	24.41"	27.56"	27.56"	32.28"	41.34"
	Depth	in.	20.87"	21.65"	20.87"	21.65"	25.59"
Bolster	Width	in.	43.31"	49.21"	35.43"	42.13"	47.24"
	Depth	in.	26.77"	29.92"	26.77"	29.92"	33.07"
	Thickness	in.	5.91"	6.50"	5.91"	6.50"	7.09"
Counter Bal. Cap	lbs.	1102	1102	2205	1102	1780	2205
Main Motor	h.p.	40	70	80	40	70	80

KOMATSU
TOMORROW'S TECHNOLOGY TODAY

www.komatsupress.com

America HQ

Komatsu America Industries, LLC
8770 W. Bryn Mawr Ave., Suite 100
Chicago, IL 60631
Phone: 847-437-3888
Fax: 847-437-1811

Mexico HQ

Komatsu Industries Mexico, S.A. de C.V. (KIMX)
Municipio de Rincón de Romos # 102-A
Parque Industrial Valle de Aguascalientes
San Francisco de los Romos, Aguascalientes, C.P. 20358
Tel : +52 (449) 973-9700