


2 0 0



3 0 0

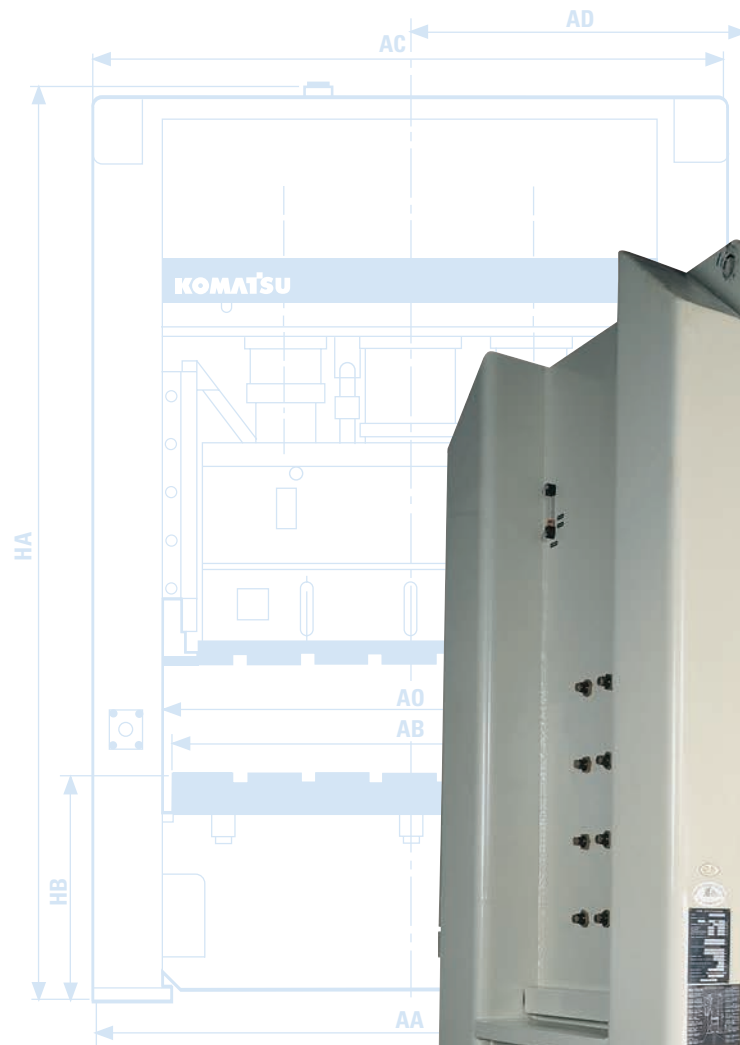



**Global Teamwork**

**KOMATSU**<sup>TM</sup>



HIGH PERFORMANCE SHOULD NOT BE OPTIONAL<sup>©</sup>



## General View

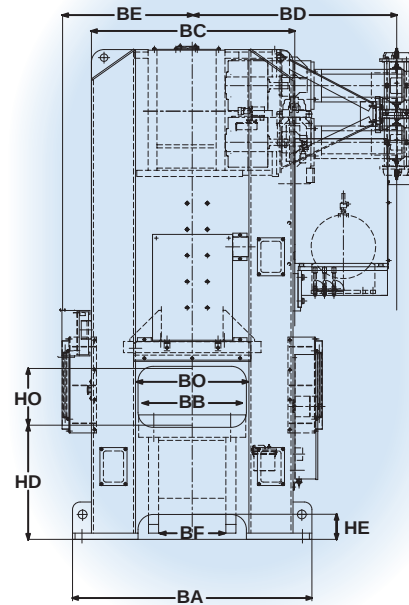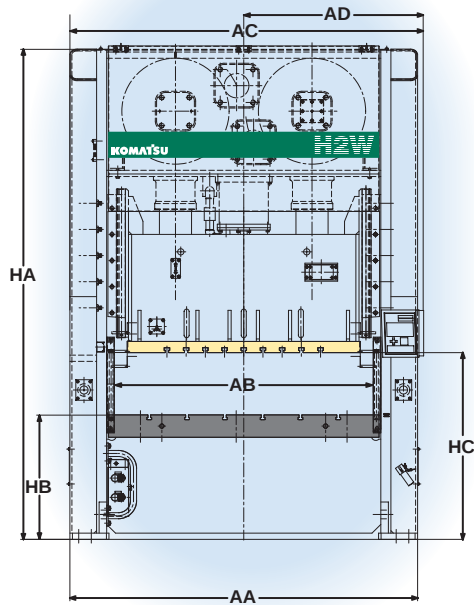

## Capacity Curves

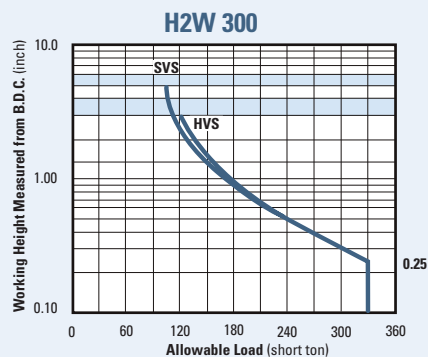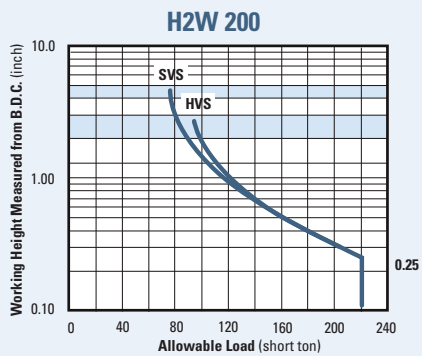

Specifications subject to change without notice.

## Dimensions inches

| Item   | Width |      |       |      |      | Depth |      |      |      |      |      |       | Height |      |      |     |      |
|--------|-------|------|-------|------|------|-------|------|------|------|------|------|-------|--------|------|------|-----|------|
| Model  | AA    | AB   | AC    | AD   | BA   | BB    | BC   | BD   | BE   | BF   | BO   | HA    | HB     | HC   | HD   | HE  | HO   |
| H2W200 | 108.7 | 84.6 | 108.7 | 56.2 | 74.8 | 43.0  | 63.0 | 72.7 | 43.3 | 14.2 | 33.9 | 156.5 | 39.4   | 57.6 | 35.4 | 7.9 | 19.3 |
| H2W300 | 125.6 | 94.5 | 125.6 | 64.8 | 87.4 | 47.2  | 75.6 | 74.1 | 49.6 | 21.3 | 38.6 | 181.7 | 45.3   | 60.8 | 43.3 | 9.8 | 20.9 |

## Specifications

| Model                   | H2W200   |  |        |  | H2W300 |  |        |  |
|-------------------------|----------|--|--------|--|--------|--|--------|--|
| Type                    | S        |  | H      |  | S      |  | H      |  |
| Max. Capacity           | U.S. ton |  | 220    |  | 330    |  |        |  |
| Rating Point            | in.      |  | 0.28   |  | 0.20   |  | 0.24   |  |
| Stroke                  | in.      |  | 9.8    |  | 5.9    |  | 11.8   |  |
| Rotation                | in.      |  | 4.3    |  | N/A    |  | 5.91   |  |
| Pendulum                | s.p.m.   |  | ~50    |  | ~85    |  | ~40    |  |
| Speed                   | s.p.m.   |  | 70     |  | N/A    |  | ~49    |  |
| Shutheight              | in.      |  | 19.7   |  | 23.6   |  |        |  |
| Slide Adjustment        | in.      |  | 4.7    |  | 7.9    |  |        |  |
| Slide - Width           | in.      |  | 72.8   |  | 82.7   |  |        |  |
| Slide - Depth           | in.      |  | 43.0   |  | 47.2   |  |        |  |
| Bolster - Width         | in.      |  | 84.6   |  | 94.5   |  |        |  |
| Bolster - Depth         | in.      |  | 43.0   |  | 47.2   |  |        |  |
| Bolster - Thickness     | in.      |  | 7      |  | 7.9    |  |        |  |
| Max. Upper Die/ Tooling | lb.      |  | 4,400  |  | 4,400  |  |        |  |
| Main Motor              | Kw (qty) |  | 55 (2) |  | 60 (2) |  | 60 (2) |  |

**KOMATSU**  
TOMORROW'S TECHNOLOGY TODAY

## America HQ

**Komatsu America Industries, LLC**  
8770 W. Bryn Mawr Ave., Suite 100  
Chicago, IL 60631  
Phone: 847-437-3888  
Fax: 847-437-1811

## Mexico HQ

**Komatsu Industries Mexico, S.A. de C.V. (KIMX)**  
Municipio de Rincón de Romos # 102-A  
Parque Industrial Valle de Aguascalientes  
San Francisco de los Romos, Aguascalientes, C.P. 20358  
Tel : +52 (449) 973-9700