

80

110

150




200



KOMATSUTM
HIGH PERFORMANCE SHOULD NOT BE OPTIONAL[®]



Capacity Curves

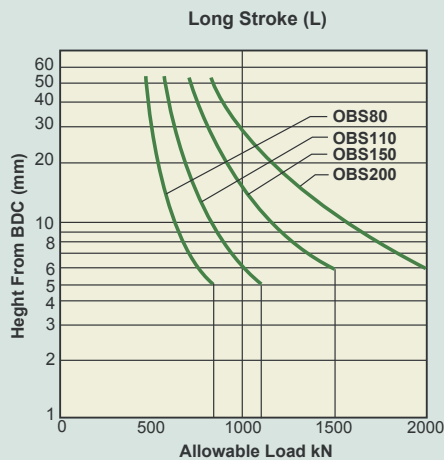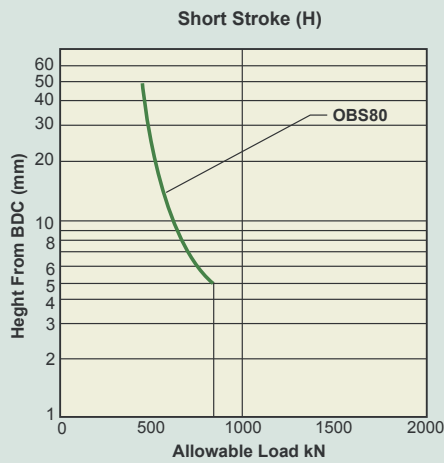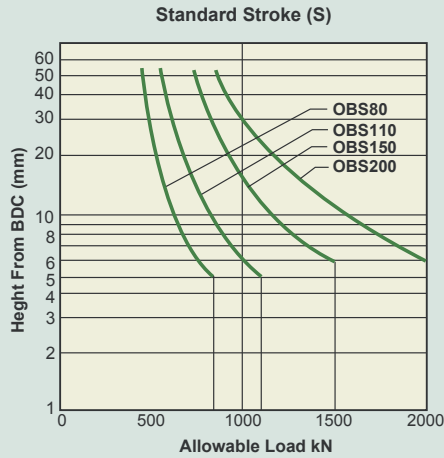

Specifications subject to change without notice.

KOMATSU
TOMORROW'S TECHNOLOGY TODAY

www.komatsupress.com


America HQ

Komatsu America Industries, LLC
8770 W. Bryn Mawr Ave., Suite 100
Chicago, IL 60631
Phone: 847-437-3888
Fax: 847-437-1811

Mexico HQ

Komatsu Industries Mexico, S.A. de C.V. (KIMX)
Municipio de Rincón de Romos # 102-A
Parque Industrial Valle de Aguascalientes
San Francisco de los Romos, Aguascalientes, C.P. 20358
Tel : +52 (449) 973-9700

General View

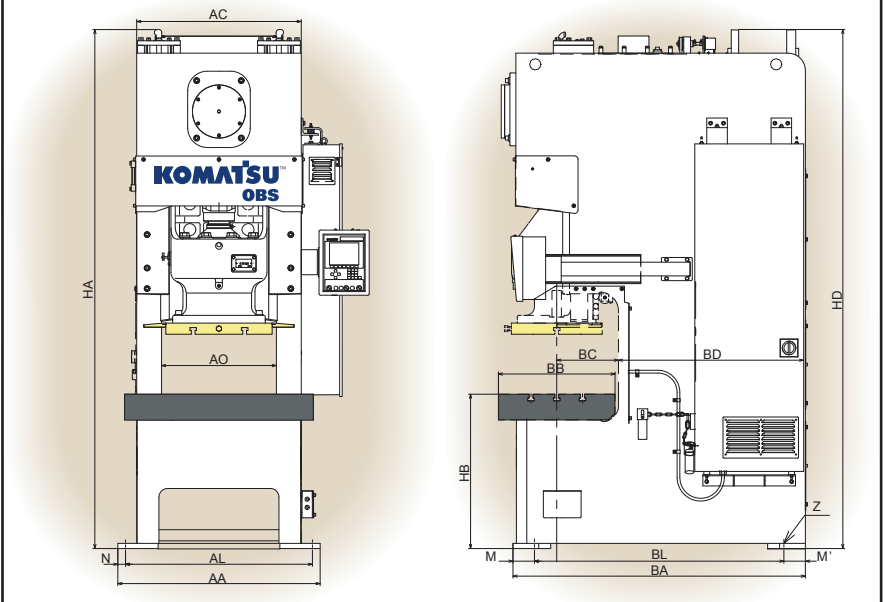

Dimensions (All inches)

Model	OBS80			OBS110		OBS150		OBS200	
Type	S	L	H	S	L	S	L	S	L
AA	39.4"			46.5"		50.8"		61.4"	
AC	33.9"			37.8"		42.5"		50.4"	
AL	37.0"			42.9"		47.6"		56.4"	
AO	25.2"			26.4"		28.3"		35.4"	
BA	60.2"	60.2"	59.3"	67.1"		76.0"		84.4"	
BB	23.6"	23.6"	18.1"	26.8"		29.9"		33.1"	
BC	12.6"	12.6"	9.4"	14.2"		15.4"		16.9"	
BD	39.8"	39.8"	42.9"	42.9"		50.0"		53.9"	
BL	52.6"	52.6"	51.6"	57.3"		64.4"		75.0"	
HA	109.1"	119.3"	106.1"	118.6"	130.0"	130.0"	141.4"	152.6"	163.9"
HB	35.4"			35.4"		35.4"		39.4"	
HD	108.4"	112.2"	107.1"	119.2"	123.5"	127.1"	131.8"	145.1"	149.6"
M	3.7"			4.9"		5.7"		4.9"	
N	1.2"			1.8"		1.6"		2.5"	
Z	1.3"			1.3"		1.3"		1.4"	

Specifications (All inches)

Model	OBS80			OBS110		OBS150		OBS200	
Type	S	L	H	S	L	S	L	S	L
Max. Capacity short ton	88			121		165		220	
Limit of capacity in.	.19"			.20"		.24"		.24"	
Slide strokes in.	5.12"	7.09"	3.94"	5.9"	7.87"	7.87"	9.84"	9.84"	11.81"
Variable speed range spm	37-75		55-110	32-65		27-55		25-50	
Die height in.	12.6"	13.78"	11.81"	13.78"	14.96"	16.54"	17.72"	17.72"	18.90"
Slide adjustment in.	3.15"			3.94"		3.94"		4.72"	
Slide dimensions (widthxdepth) in.	21.65" x 17.72"			24.41" x 20.87"		27.56" x 21.65"		33.46" x 25.59"	
Diameter of shank hole in.	2.63"			3.13"		3.13"		3.13"	
Bolster (widthxdepthxthickness) in.	S, L = 39.37" x 23.62" x 5.51" H = 39.37" x 18.11" x 5.51"			43.31" x 26.77" x 5.91"		49.21" x 29.92" x 6.5"		57.09" x 33.07" x 7.48"	
Motor output hp.	10			15		15		20	